


## 976nm 400W High Power High Brightness Small Size Fiber Coupled Diode Laser

**RPK976S-400.0W-20022-NA (Customized Product)**

---

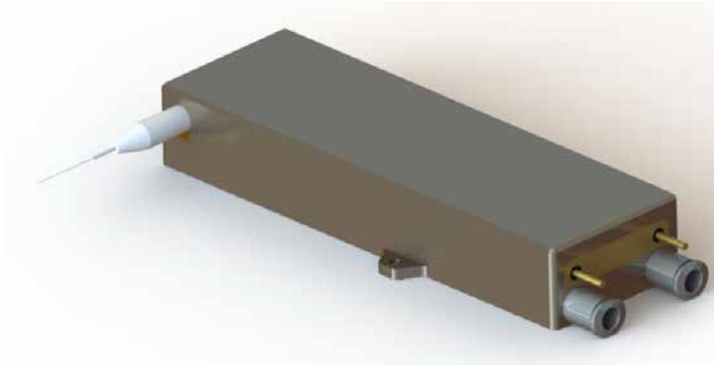

### Features:

- ◆ 976nm wavelength
- ◆ 400W output power
- ◆ 200μm fiber core diameter
- ◆ 0.22NA
- ◆ 1020nm-1200nm feedback protection

### Applications:

- ◆ Laser pumping

High power diode laser modules are manufactured by adopting specialized fiber-coupling techniques, resulting in volume products with a high efficiency, stability and superior beam quality. The products are achieved by transforming the asymmetric radiation from the laser diode chip into an output fiber with small core diameter by using special micro optics. Inspecting and burn-in procedures in every aspect come to a result to guarantee each product with the reliability, stability and long lifetime.

Our research staffs are constantly improving and innovating the processing technology in the producing process, based on the professional knowledge and experience accumulated in long-terms. We are also continuously developing new products to meet customers' specific needs.

High quality products with reasonable price is our always goal.

**976nm 400W High Power High Brightness Small Size Fiber Coupled Diode Laser**  
**RPK976S-400.0W-20022-NA (Customized Product)**

Specifications(25°C)		Symbol	Unit	RPK976S-400.0W-20022-NA		
				Minimum	Typical	Maximum
Optical Data <sup>(1)</sup>	CW-Output Power	P <sub>o</sub>	W	400	-	-
	Center Wavelength	λ <sub>c</sub>	nm	976±1		
	Spectral Width (FWHM)	Δλ	nm	<0.7		
	Wavelength-Stabilized Operating Range <sup>(2)</sup>	-	Å	(I <sub>op</sub> -2) ~ I <sub>op</sub>		
	Wavelength Shift with Temperature	Δλ/ΔT	nm/°C	-	0.02	-
Electrical Data	Electrical-to-Optical Efficiency	PE	%	-	50	-
	Operating Current	I <sub>op</sub>	A	-	20	22
	Threshold Current	I <sub>th</sub>	A	-	0.7	-
	Operating Voltage	V <sub>op</sub>	V	-	40	42
	Slope Efficiency	η	W/A	-	21	-
Fiber Data	Core diameter	D <sub>core</sub>	μm	-	200	-
	Cladding diameter	D <sub>clad</sub>	μm	-	220	-
	Buffer diameter	D <sub>buf</sub>	μm	-	320	-
	Numerical Aperture	NA	-	-	0.22	-
	Total Fiber Length	L <sub>f</sub>	m	-	2	-
	Fiber Loose Tubing Diameter	-	mm	0.9		
	Minimum Bending Radius	-	mm	88	-	-
Feedback Isolation	Fiber termination	-	-	-	-	-
	Wavelength Range	λ	nm	1020~1200		
Others	Isolation	-	dB	-	30	-
	ESD	V <sub>esd</sub>	V	-	-	500
	Storage Temperature <sup>(3)</sup>	T <sub>st</sub>	°C	-20	-	70
	Lead Soldering Temp	T <sub>is</sub>	°C	-	-	260
	Lead Soldering Time	t	sec	-	-	10
	Operating Case Temperature <sup>(4)</sup>	T <sub>op</sub>	°C	20	-	30
	Relative Humidity	RH	%	15	-	75
	Main Dimensions	D	mm	145*60*23		
Weight	W	g		250		

(1) Data measured under operation output at 400W@25°C.


(2) Wavelength-Stabilized : Power in band of 974.5nm to 977.5nm ≥90%.

(3) A non-condensing environment is required for operation and storage.

(4) Operating temperature defined by the package case. Acceptable operating range is 20°C~30°C, but performance may vary.

**976nm 400W High Power High Brightness Small Size Fiber Coupled Diode Laser**  
**RPK976S-400.0W-20022-NA (Customized Product)**

**Package Dimensions (mm)**

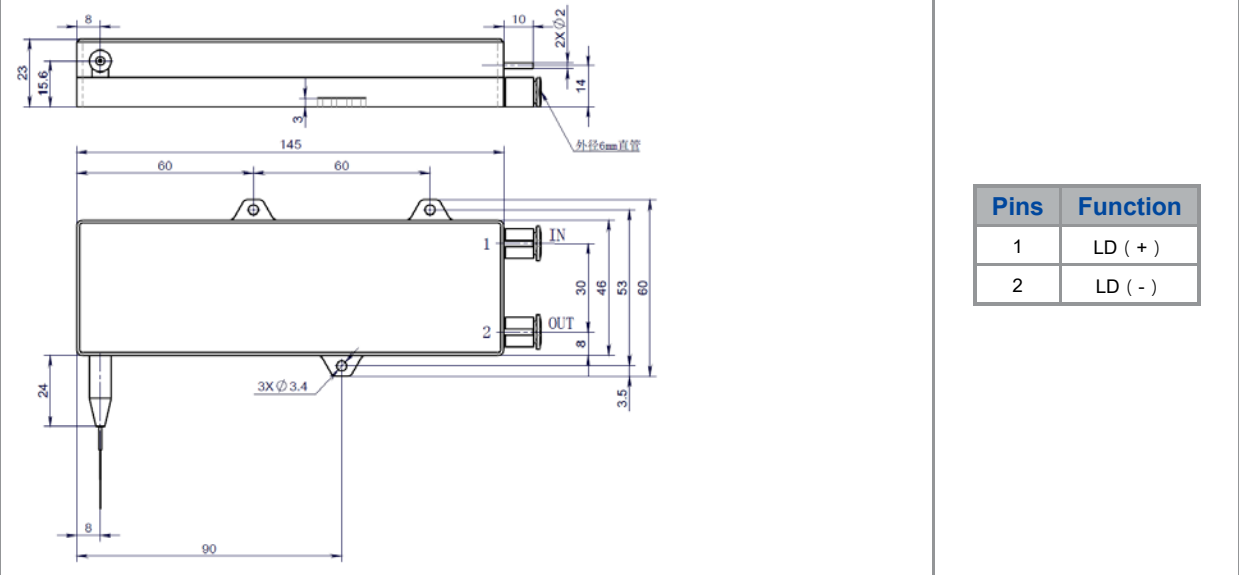

**OPERATING NOTES**

- ◆ Avoid eye and skin exposure to direct radiation during operation.
- ◆ ESD precautions must be taken during storage, transportation and operation.
- ◆ Please connect pins to wires by solder instead of using socket when operation current is higher than 6A. Soldering point should be close to the root of the pins. Soldering temperature should be lower than 260°C and time shorter than 10 second.
- ◆ Make sure the fiber output end is properly cleaned before operation of laser. Follow safety protocols to avoid injury when handling and cutting the fiber.
- ◆ Use constant current power supply to avoid surge current during operation.
- ◆ Laser diode must be used according to the specifications.
- ◆ Laser diode must work with good cooling.
- ◆ Operation temperature ranges from 20°C to 30°C .
- ◆ Storage temperature ranges from -20°C to +70°C .

