


Multi-Wavelength Detachable Diode Laser
RPKA008D010F0X3AM (Customized Product)

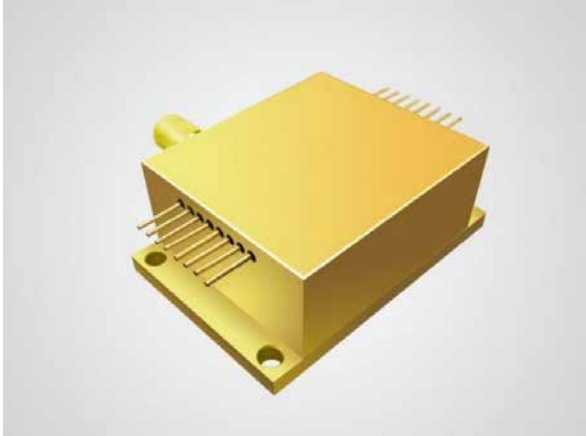

Features:

- ♦ Multiple wavelength
- ♦ Multiple function
- ♦ 200μm fiber detachable

Applications:

- ♦ Medical Use

High Power Diode Laser Modules are manufactured by adopting specialized fiber-coupling techniques, resulting in volume products with a high efficiency, stability and superior beam quality. The products are achieved by transforming the asymmetric radiation from the laser diode chip into an output fiber with small core diameter by using special micro optics. Inspecting and burn-in procedures in every aspect come to a result to guarantee each product with the reliability, stability and long lifetime.

Our research staffs are constantly improving and innovating the processing technology in the producing process, based on the professional knowledge and experience accumulated in long-terms. We are also continuously developing new products to meet customers' specific needs.

High quality products with reasonable price is always our goal.

Multi-Wavelength Detachable Diode Laser

RPKA008D010F0X3AM

Specifications(25°C)		Symbol	Unit	RPKA008D010F0X3AM		
				Minimum	Typical	Maximum
808 ⁽¹⁾	CW Output Power	P _o	W	8	-	-
	Center Wavelength	λ _c	nm	808±10		
	Operating Current	I _{op}	A	-	-	11
	Threshold Current	I _{th}	A	-	0.8	-
	Operating Voltage	V _{op}	V	-	-	2
980⁽¹⁾	CW Output Power	P _o	W	10	-	-
	Center Wavelength	λ _c	nm	980±10		
	Operating Current	I _{op}	A	-	-	13.5
	Threshold Current	I _{th}	A	-	1	-
	Operating Voltage	V _{op}	V	-	-	2
635 ⁽¹⁾	CW Output Power	P _o	W	0.3	-	-
	Center Wavelength	λ _c	nm	635±10		
	Operating Current	I _{op}	A	-	-	0.8
	Threshold Current	I _{th}	A	-	0.2	-
	Operating Voltage	V _{op}	V	-	-	2.6
Fiber Data	Core Diameter	D _{core}	μm	-	200	-
	Numerical Aperture	NA	-	-	0.22	-
	Fiber Connector	-	-	-	SMA905	-
Thermistor	-	R _t	(K Ω)/β(25°C)	10±3%/3477		
PD	-	PD	μA	10	-	-
Other	ESD	V _{esd}	V	-	-	500
	Storage Temperature ⁽²⁾	T _{st}	°C	-20	-	70
	Lead Soldering Temp	T _{ls}	°C	-	-	260
	Lead Soldering Time	t	sec	-	-	10
	Operating Case Temperature ⁽³⁾	T _{op}	°C	15	-	35
	Relative Humidity	RH	%	15	-	75


(1) Data measured under operation temperature at 25°C

(2) A non-condensing environment is required for operation and storage.

(3) Operating temperature defined by the package case, Acceptable operating range is 15°C~35°C, but performance may vary.

Multi-Wavelength Detachable Diode Laser RPA008D010F0X3AM (Customized Product)

Package Dimensions (mm)

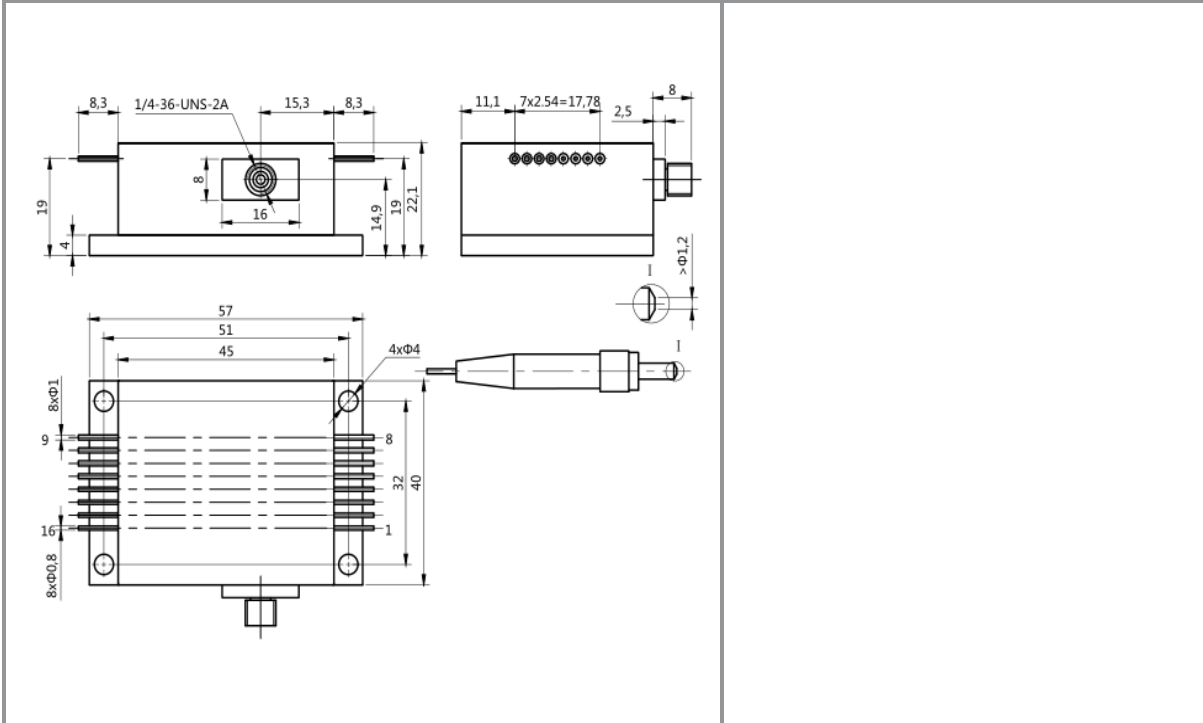

OPERATING NOTES

- ◆ Avoid eye and skin exposure to direct radiation during operation.
- ◆ ESD precautions must be taken during storage, transportation and operation.
- ◆ Make sure the fiber output end and input end is properly cleaned before operation of laser. Follow safety protocols to avoid injury when handling and cutting the fiber.
- ◆ Use constant current power supply to avoid surge current during operation.
- ◆ Laser diode must be used according to the specifications.
- ◆ Laser diode must work with good cooling.
- ◆ Operation temperature ranges from 15°C to 35°C .
- ◆ Storage temperature ranges from -20°C to +70°C .

